

Bi-Metal Thermowells

Lagging



Product Specifications

Material

Brass
304 Stainless Steel
316 Stainless Steel
Others Optional

Instrument Connection

1/2" Standard

Process Connection

1/2", 3/4", 1" NPT

Standard Bore

0.260 Standard
Others Optional

Shank

Stepped - Standard
Straight - Optional
Tapered - Optional



Options

Material Certificate
Custom Custom Lengths
Custom Connection Sizes
Custom Materials

Thermowells are protective sheaths used to allow for the safe installation and removal of temperature instruments. Thermowells also protect the instrument against process pressures and are offered in wide variety of materials to resist corrosion.

"S" Stem	"U" Insertion	"T" Lag
6"	2 1/2"	2 3/4"
9"	4 1/2"	3 3/4" or 4"
12"	7 1/2"	3 3/4" or 4"
18"	13 1/2"	3 3/4" or 4"
24"	19 1/2"	3 3/4" or 4"

Product Dimensions

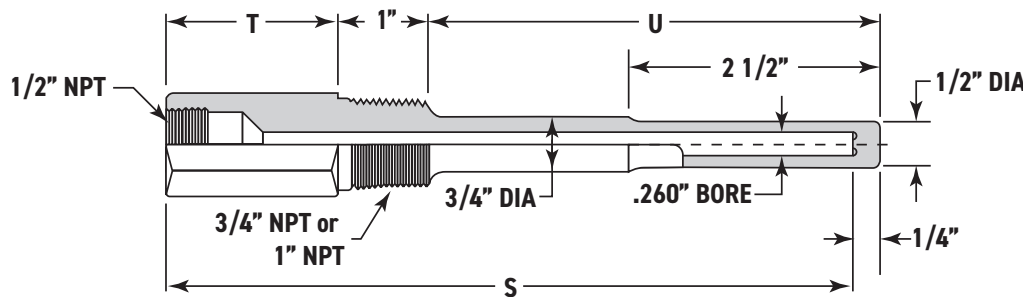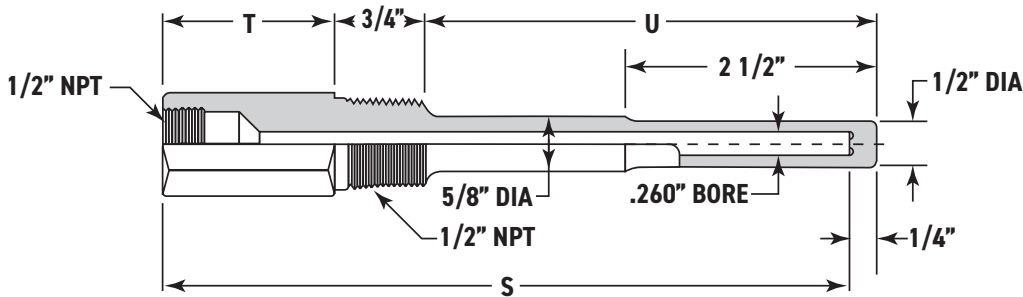

Interested in ordering? Ordering information available at MarshGauges.com